

Comparison of performance on 1/4" (6mm) thick clear glass.

Glare reduction




1 2 3 4

Most private

5

Least

private

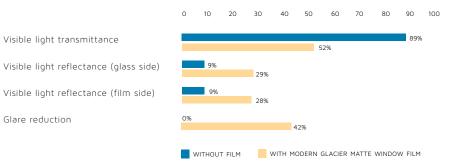

SAINT-GOBAIN

Modern Glacier Matte

Notes

- Performance results are calculated using NFRC methodology and LBNL Window software, and are subject to variations within industry standards and only intended for estimating purposes. This data is provided for informational purposes only and are subject to normal manufacturing variances.
- 2. For full details and additional information please visit www.solargard.com/byDESIGN

Performance results	1/4" (6mm)
Visible light	
% Transmittance	52
% Reflectance (glass side)	29
% Reflectance (film side)	28
% Glare reduction	42
Solar heat gain coefficient	.60

Physical properties	
Gauge	2.0 mil (50 micron)
Туре	Polyester
Adhesive	Clear, pressure-sensitive
Release liner	1.0 mil (25 micron)
Privacy factor (1-5)	5

- - -

SK0314BDMGM 5/20

© 2020, Saint-Gobain High Performance Solutions and/or its affiliates • All Rights Reserved www.solargard.com/byDESIGN

